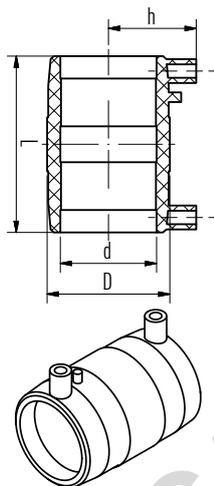

Manicotto

SDR 6 / 7,4 / 9 / 11 / 17,6

 Materiale: fusiolen® PP-R
 Standard: DIN 16962, DIN EN ISO 15874
 Colore: verde

Articolo no.	d	D	L	z	kg	Conf.	GP
Saldatura a tasca							
1040020002	20	27,0	32,0	3,0	0,008	10	A
1040025003	25	34,0	35,0	3,0	0,013	10	A
1040032004	32	43,0	40,5	4,5	0,026	5	A
1040040005	40	52,0	47,5	6,5	0,044	5	A
1040050006	50	68,0	53,0	6,0	0,084	5	A
1040063007	63	84,0	60,5	5,5	0,139	1	A
1040075008	75	100,0	66,5	6,5	0,226	1	A
1040090009	90	120,0	72,5	6,5	0,343	1	A
1040110010	110	147,0	82,0	8,0	0,581	1	A
1040125011	125	167,0	92,0	12,0	0,845	1	A


Elettromanico 40 V

SDR 6 / 7,4 / 9 / 11 / 17,6

 Materiale: fusiolen® PP-R
 Standard: DIN 16962, DIN EN ISO 15874
 Colore: verde

Articolo no.	d	D	L	H	kg	Conf.	GP
Saldatura a tasca							
1040020094	20	31,5	70,0	36,0	0,049	1	A
1040025100	25	36,5	78,0	38,5	0,057	1	A
1040032101	32	45,0	80,0	42,5	0,077	1	A
1040040102	40	54,0	92,0	47,0	0,103	1	A
1040050103	50	65,0	103,0	52,0	0,142	1	A
1040063104	63	81,5	118,0	58,0	0,239	1	A
1040075105	75	96,0	130,0	64,5	0,347	1	A
1040090106	90	113,5	145,0	72,0	0,501	1	A
1040110107	110	139,0	160,0	82,5	0,821	1	A
1040125108	125	156,0	172,0	90,0	1,097	1	A
1040160109 *	160	197,0	186,0	109,5	1,754	1	B
1040200110 *	200	243,0	210,0	134,0	3,625	1	B
1040250111 *	250	315,0	250,0	170,0	7,142	1	B

*Elettromanico non adatto per raccordi stampati ad iniezione da 160 mm a 250 mm (non utilizzare con aquatherm blue pipe MF OT)