


MARKING:  
FERRARI DN25  
Pmax 2.5 bar  
YY/WW  
LOT NO

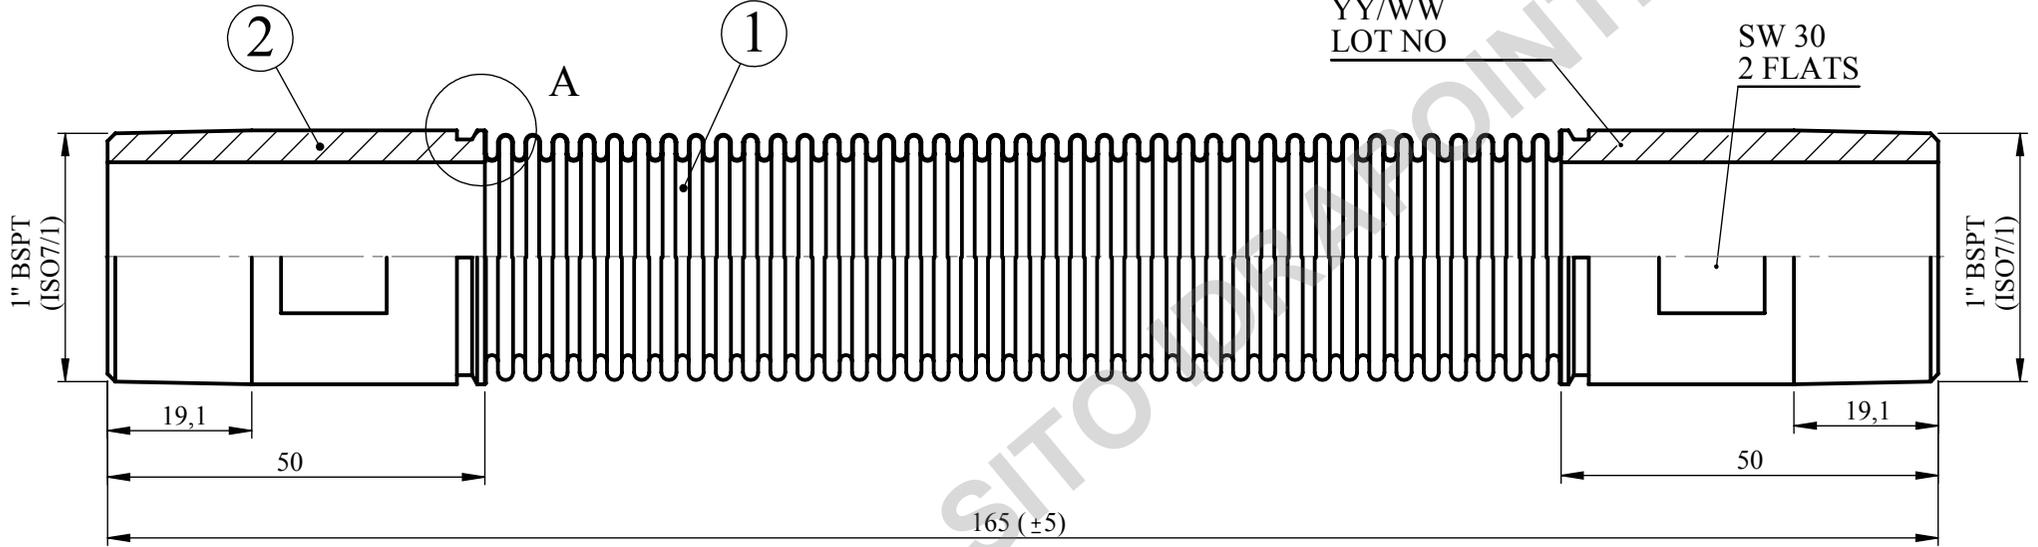


**NOT: KOLİ İÇİ MİKTAR 20  
TEK TEK POŞETLENECEKTİR.  
POŞET ÜZERİNE ETİKET  
YAPIŞTIRILACAKTIR.**

**%40 CLOSED**

3.1 certificate will be delivered

MONTAJ NO PART NR	PARÇA ADI / İTEMİNİME	RESİM NO / DRAWING NO	ADET QTY	MALZEME MATERIAL
2	1" BSPT NİPPEL	0736 0018 02	2	AI31304/14301
1	KZ300 DN25 WB	0000 1004 65	1	AI31316L



DETAY A  
ÖLÇEK 2 : 1

Rev.	Description	Date	Drawer	Visa																																																															
1	Nipel ve markalama değiştirilmiştir. DBF0286	12.12.2016	SEDA ÇAKIR	BAHRİ BİÇİMSEVEN																																																															
0	İlk yayın	17.06.2016	SEDA ÇAKIR	BAHRİ BİÇİMSEVEN																																																															
<table border="1"> <thead> <tr> <th>General Tolerances EN 22768 f</th> <th colspan="5">Angles related to shortest side (mm)</th> <th colspan="3">Chamfer &amp; Radius (mm)</th> <th colspan="5">Linear Dimensions (mm)</th> <th colspan="2">Scale 1/1</th> <th colspan="2">Sheet 1/1</th> <th colspan="2">KUZUFLEX® Flexible Metal Hoses</th> </tr> <tr> <td>From To</td> <td>&lt;10</td> <td>10 50</td> <td>50 120</td> <td>120 400</td> <td>&gt;400</td> <td>0,5 3</td> <td>3 6</td> <td>&gt;6</td> <td>&lt;6</td> <td>6 30</td> <td>30 120</td> <td>120 400</td> <td>400 1000</td> <td>&gt;1000</td> <td>Scale 1/1</td> <td>Sheet 1/1</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>Surface Roughness EN ISO 1302</td> <td>Tol.</td> <td>±1°</td> <td>±30'</td> <td>±20'</td> <td>±10'</td> <td>±5'</td> <td>±0.2</td> <td>±0.5</td> <td>±1</td> <td>±0.05</td> <td>±0.1</td> <td>±0.15</td> <td>±0.2</td> <td>±0.3</td> <td>±0.5</td> <td>Scale 1/1</td> <td>Sheet 1/1</td> <td colspan="2"></td> <td colspan="2"></td> </tr> </thead> </table>					General Tolerances EN 22768 f	Angles related to shortest side (mm)					Chamfer & Radius (mm)			Linear Dimensions (mm)					Scale 1/1		Sheet 1/1		KUZUFLEX® Flexible Metal Hoses		From To	<10	10 50	50 120	120 400	>400	0,5 3	3 6	>6	<6	6 30	30 120	120 400	400 1000	>1000	Scale 1/1	Sheet 1/1					Surface Roughness EN ISO 1302	Tol.	±1°	±30'	±20'	±10'	±5'	±0.2	±0.5	±1	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	Scale 1/1	Sheet 1/1				
General Tolerances EN 22768 f	Angles related to shortest side (mm)					Chamfer & Radius (mm)			Linear Dimensions (mm)					Scale 1/1		Sheet 1/1		KUZUFLEX® Flexible Metal Hoses																																																	
From To	<10	10 50	50 120	120 400	>400	0,5 3	3 6	>6	<6	6 30	30 120	120 400	400 1000	>1000	Scale 1/1	Sheet 1/1																																																			
Surface Roughness EN ISO 1302	Tol.	±1°	±30'	±20'	±10'	±5'	±0.2	±0.5	±1	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	Scale 1/1	Sheet 1/1																																																		
ADDITIONAL OPERATION		Heat Treatment	Net Weight	Material	Customer Article No	Item Name			Drawing No		Rev.																																																								
			305 gr		031442	KZ300 DN25 WB ASSEMBLY L=165mm			0736 0018 00		1																																																								

Certification Level	
Inspection Class	