

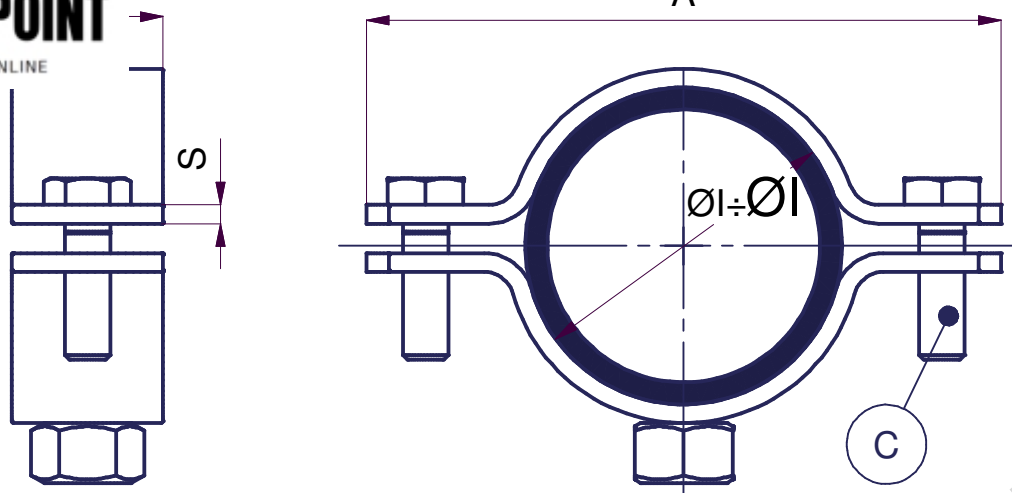




Ø Tubo	ØI ÷ ØI [mm]	A ± 2 [mm]	B [mm]	S [mm]	C [mm]		F _T [daN]	F _V [daN]	Note
3/8"	16÷20	54	20	2	M6x20	M8	150	300	
1/2"	20÷24	60	20	2	M6x20	M8	150	300	
3/4"	25÷30	65	20	2	M6x20	M8	150	300	
1"	32÷36	73	20	2	M6x20	M8	150	300	
1.1/4"	38÷44	86	20	2	M6x20	M8	150	300	
1.1/2"	46÷50	91	20	2	M6x20	M8	150	300	
2"	58÷62	106	20	2	M6x20	M8	150	300	
2.1/2"	74÷80	122	30	2,5	M6x20	M10	175	350	
3"	84÷89	137	30	2,5	M6x20	M10	175	350	
4"	112÷118	164	30	2,5	M6x20	M10	175	350	
5"	134÷138	192	30	2,5	M6x20	M10	175	350	
6"	164÷172	218	30	2,5	M6x20	M10	175	350	

F_V - Carico ammissibile verticale massimo da non superare in condizioni d'impiego (1 daN ~ 1 Kg).
 F_T - Carico ammissibile orizzontale massimo da non superare in condizioni d'impiego (1 daN ~ 1 Kg).



Numero Documento: 0837-I	Revisione: A	Pagina: 1 di 1	Norma di riferimento: ////	Articolo: 0837-I
Data creazione: 11/02/2005	Data Revisione: 01-01-2013	Autore: Frasconi		



Descrizione:

COLLARE PESANTE INOX AISI 304 (A2)